

Features:

- QSFP-DD Module compliant to QSFP-DD MSA
- SFP Module compliant to SFF-8431/8432, INF-8074i
- Transmission data rate up to 25.78Gbps per channel
- Enable 200Gb/s to 8x25Gb/s Transmission
- Link length up to 4.5m
- Built-in EEPROM functions
- Operating case temperature 0°C to +70°C
- RoHS2.0 compliant



1. Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	Vcc	3.13	3.3	3.47	V
Storage temperature	Ts	-40	-	85	°C
Operating Case temperature	Tc	0	-	70	°C
Humidity	Rh	5		85	%
Data Rate	-	-	200	-	Gbps


2. Physical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit
Length	L	0.5		4.5	M
AWG		30		27	AWG
Jacket material		PVC, Black (or Customization)			

3. Electrical Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Resistance	Rcon	-	-	3	ohm
Insulation Resistance	Rins	-	-	10	Mohm
Raw cable impedance	Zca	95	100	110	ohm
Mated connector Impedance	Zmated	85	100	110	ohm
Insertion loss at 12.89GHz	SDD21	8		22.48	dB
Return loss	SDD11/22	$\text{Return_loss}(f) \geq \begin{cases} 16.5-2\sqrt{f} & 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1 \leq f \leq 19 \end{cases}$			dB
Differential to common-mode return loss	SDD11/22	$\text{Return_loss}(f) \geq \begin{cases} 22-(20/25.78)f & 0.01 \leq f < 12.89 \\ 15-(6/25.78)f & 12.89 \leq f \leq 19 \end{cases}$			dB
Differential to common-mode conversion loss	SCD21-SDD21	$\text{Conversion_loss}(f) - \text{IL}(f) \geq \begin{cases} 10 & 0.01 \leq f < 12.89 \\ 27-(29/22)f & 12.89 \leq f < 15.7 \\ 6.3 & 15.7 \leq f \leq 19 \end{cases}$			dB
Minimum COM	COM	3			dB

4. Mechanical Diagram

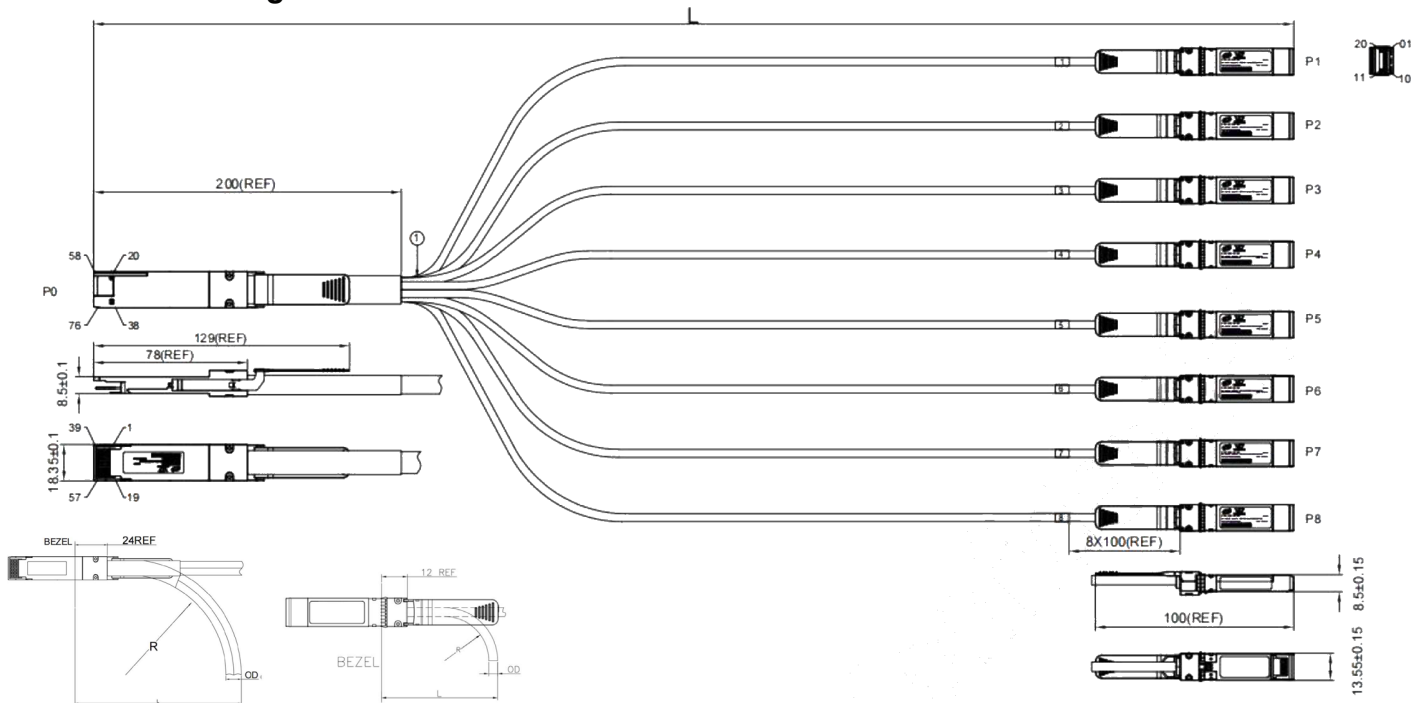

Note: External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.

QSFP-DD				SFP28			
Guage	OD	Bend Radius R	Min. Bend Radius L	Guage	OD	Bend Radius R	Min. Bend Radius L
30AWG	14MM	70MM	170MM	30AWG	4.25MM	22MM	38MM
28AWG	17MM	85MM	190MM	28AWG	4.9MM	25MM	42MM
27AWG	18MM	90MM	195MM	27AWG	5.2MM	26MM	44MM

5. Ordering Information

OEM	Part Number	OEM	Part Number
Arista	CAB-D-8S-200G-1M-A	Arista	CAB-D-8S-200G-1.5M-A
Arista	CAB-D-8S-200G-2M-A	Arista	CAB-D-8S-200G-2.5M-A
Arista	CAB-D-8S-200G-3M-A	Arista	CAB-D-8S-200G-3.5M-A
Arista	CAB-D-8S-200G-4M-A	MSA	AN-QDD200G8S-P-1M
MSA	AN-QDD200G8S-P-1.5M	MSA	AN-QDD200G8S-P-2M
MSA	AN-QDD200G8S-P-2.5M	MSA	AN-QDD200G8S-P-3M
MSA	AN-QDD200G8S-P-3.5M	MSA	AN-QDD200G8S-P-4M

6. Contact Information

Tel: 800.590.9535

Web: <http://www.approvednetworks.com>