

PASSIVES DATA SHEET

8 Channel Dual Fiber CWDM Mux/Demux with 1310nm Channel



Champion ONE's CWDM passive networking products for inside and outside plant applications provide a cost-effective, high-reliability solution to fiber capacity challenges.

Technical Specifications

WAVELENGTH INFORMATION

Operating wavelengths: 1260nm – 1620nm (including pass band)
 Center wavelengths: 1310nm, 1470nm – 1610nm
 CWDM channel spacing: 20 nm
 Passband width: ITU ± 6.5nm
 1310nm channel width: ITU ± 50nm

FORM FACTOR AND CONNECTOR TYPES

Single-wide LGX
 LC/UPC connectors

DIMENSIONS (LXWXH)

Body: 130 x 100 x 28.5 mm
 Faceplate: 130 x 28.5mm

TEMPERATURE RANGE

-40° C to 85° C

WARRANTY

All feature a limited 5-year warranty

COMPLIANCES

RoHS compliant
 Telcordia GR-1209, GR-1221


Parameter	Value
1310nm Channel Insertion Loss (dB)	≤ 1.5
CWDM Channel Insertion Loss (dB)	≤ 3.3
Mon Port Insertion Loss (mux/demux, dB)	≤ 22.3 / 19.0
Passband Ripple (dB)	≤ 0.5
Adjacent Channel Isolation between CWDM Channels (dB)	≥ 30
Non-Adjacent Channel Isolation Between CWDM Channels (dB)	≥ 40

Parameter	Value
1310nm Channel Isolation (dB)	≥ 30
Polarization Dependent Loss (dB)	≤ 0.2
Directivity (dB)	≥ 50
Return Loss (dB)	≥ 45
Polarization Mode Dispersion (ps)	≤ 0.2
Fiber Type	SMF-28 9 / 125 / 250 μm
Max Power Handling (mW)	300

Ordering Information

C1 Part Number	Description
ZS-CWDM-AF03M31-LL	CWDM Mux/Demux 8+1 channel, 1470-1610nm+1310nm, single wide LGX with 2% MON, LC

Network Diagram

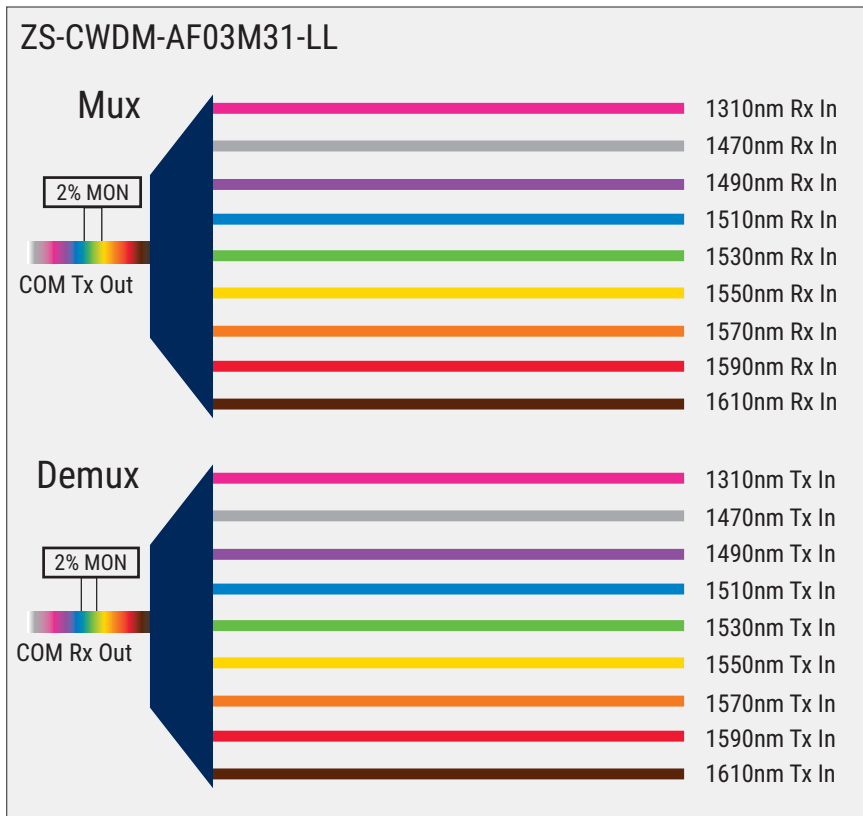

Mounting Options



14-Slot 3RU Chassis
C1 Part Number: **ZS-LGX3R-14S-CHASSIS-1923**



3-Slot 1RU Chassis
C1 Part Number: **ZS-LGX1R-3S-CHASSIS-1923**




2-Slot Magnetic "C" Bracket
C1 Part Number: **LGX-2U2L**




3-Slot 1RU Faceplate
C1 Part Number: **LGX1R-FACEPLATE**


Physical Diagrams

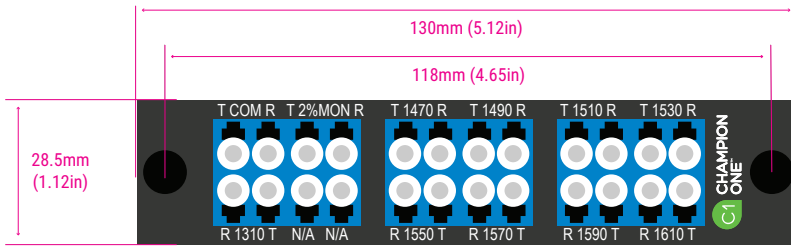

Front View

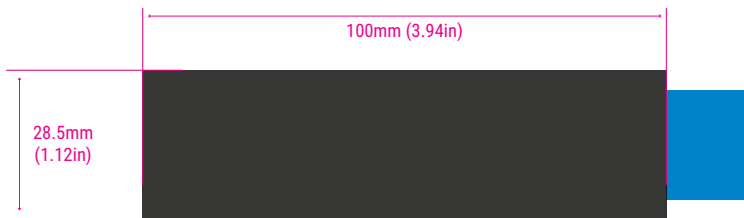

Side View

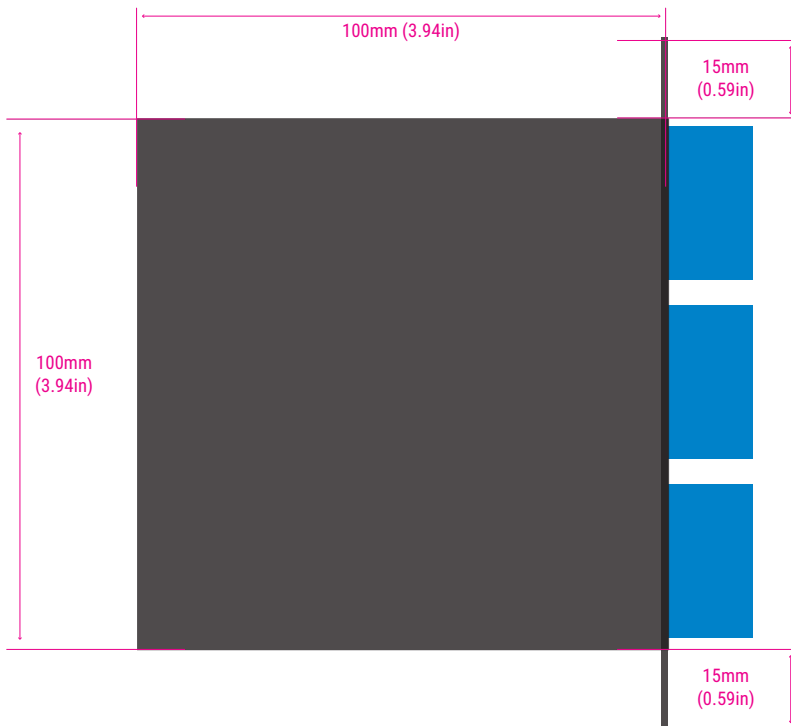

Top View