



QDD-800G-DR8-M16-5

800GBase-DR8, QSFPDD, 8x 100G DR SMF TRANSCEIVER
1310nm, 500m REACH, DUAL MPO-12 APC CONNECTORS

Features

- Compliant with IEEE 802.3cu-2021:
- 8x100GBASE-DR optical interface
- Compliant with IEEE 802.3ck-2022:
- 8x100GAUI-1 C2M electrical interface
- Compliant with QSFP-DD MSA HW Rev 6.01
type 2A with MPO-16 connector
- Compliant with CMIS Rev 5.0
- Case operating temperature 0°C to 70°C
- Two wire serial Interface with digital diagnostic monitoring
- Complies with EU Directive 2011/65/EU (RoHS compliant)
- Class 1 Laser

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
Storage Temperature	TS	-40	85	°C
Supply Voltage	VCC	-0.5	3.6	V
Relative Humidity (non-condensing)	RH	5	95	%
Data Input Voltage Differential	IVDIP-VDINI	-	1	V
Control Input Voltage	VI	-0.3	VCC+0.5	V
Control Output Current	IO	-20	20	mA

Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Case Temperature	TOPR	0	-	70	°C
Power Supply Voltage	VCC	3.135	3.3	3.465	V
Instantaneous peak current at hot plug	ICC_IP	-	-	7200	mA
Sustained peak current at hot plug	ICC_SP	-	-	5940	mA
Maximum Power Dissipation	PD	-	-	18	W
Maximum Power Dissipation, Low Power Mode	PDLP	-	-	2.5	W

Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Signalling Speed per Lane	DRL	-	53.125	-	GBd
Control Input Voltage High	VIH	VCC*0.7	-	VCC+0.3	V
Control Input Voltage Low	VIL	-0.3	-	VCC*0.3	V
Two Wire Serial Interface Clock Rate	-	-	-	400	kHz
Power Supply Noise 1 kHz - 1 MHz (p-p)	-	-	-	66	mVpp
Operating Distance	-	2	-	500	m

Optical Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Transmitter						
Wavelength	λ_C	1304.5	1311	1317.5	nm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Average Launch Power, each lane	AOPL	-2.9	-	4.0	dBm	1
Outer Optical Modulation Amplitude (OMA _{outer}), Each Lane	TOMA	-0.8	-	4.2	dBm	
Launch power in OMA _{outer} minus TDECQ, each lane for Extinction Ratio ≥ 5 dB	TOMA-TDECQ	-2.2	-	-	dBm	
for Extinction Ratio < 5 dB		-1.9	-	-		
Transmitter and Dispersion Eye Closure for PAM4 (TDECQ), Each Lane	TDECQ	-	-	3.4	dB	
TDECQ – $10\log_{10}(C_{eq})$, Each Lane	C _{eq}	-	-	3.4	dB	
Average Launch Power of OFF Transmitter, each lane	TOFF	-	-	-15	dBm	
Extinction Ratio	ER	3.5	-	-	dB	
Transmitter Transition Time	Tr			17	ps	
RIN _{15.5OMA}	RIN	-	-	-136	dB/Hz	
Optical Return Loss Tolerance	ORL	-	-	15.5	dB	
Transmitter Reflectance	TR	-	-	-26	dB	2
Receiver						
Wavelength	λ_{C0}	1304.5	1311	1317.5	nm	
Damage Threshold, each Lane	AOPD	5	-	-	dBm	
Average Receive Power, each Lane	AOPR	-5.9	-	4	dBm	
Receive Power (OMA _{outer}), each Lane	OMAR	-	-	4.2	dBm	
Receiver Reflectance	RR	-	-	-26	dB	
Receiver Sensitivity (OMA _{outer}), each Lane	SOMA	-	-	(-3.9, SECQ – 5.3)	dBm	3
Stressed Receiver Sensitivity (OMA _{outer}), each Lane	SRS	-	-	-1.9	dBm	4
Conditions of stressed receiver sensitivity test						
Stressed eye closure for PAM4 (SECQ), lane under test	SECQ	-	3.4	-	dB	
SECQ – $10\log_{10}(C_{eq})$, lane under test	C _{eq}	-	-	3.4	dB	
OMA _{outer} of each aggressor lane	-	-	4.2	-	dBm	


Notes:

1. Average launch power, each lane (min) is informative and not the principal indicator of signal strength.
2. Transmitter reflectance is defined looking into the transmitter.
3. Receiver sensitivity (OMA_{outer}), each lane (max) is informative and is defined for a transmitter with a value of SECQ up to 3.4 dB.
4. Measured with conformance test signal at TP3 for the BER = 2.4×10^{-4}

Electrical Specification - High Speed Signal (compliant with IEEE802.3df C2M)					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Receiver (Module Output, TP4)					
Peak-to-peak AC Common-mode Voltage Low-frequency, VCMLF Full-band, VCMFB	-	-	-	32 80	mV
Differential peak-to-peak Output Voltage Short Mode Long Mode	- -	- -	- -	600 845	mV
Eye Height	EH	15	-	-	mV
Vertical Eye Closure	VEC	-	-	12	dB
Common-mode to Differential-mode Return Loss	RLDc	802.3ck 120G-1			dB
Effective Return Loss	ERL	8.5	-	-	dB
Differential Termination Mismatch	-	-	-	10	%
Transition Time	-	8.5	-	-	ps
DC Common-mode Voltage Tolerance	-	-0.35	-	2.85	V
Transmitter (Module Input, TP1)					
Differential pk-pk Input Voltage Tolerance (TP1a)	-	750	-	-	mV
Peak-to-peak AC common-mode voltage tolerance Low-frequency, VCMLF Full-band, VCMFB	- -	32 80	- -	- -	mV
Differential-mode to Common-mode Return Loss	RLcd	802.3ck 120G-2	dB		
Effective Return Loss	ERL	8.5	-	-	dB
Differential Termination Mismatch	-	-	-	10	%
Single-ended Voltage Tolerance Range	-	-0.4	-	3.3	V
DC Common-mode Voltage Tolerance	-	-0.35	-	2.85	V

Electrical Specification Low Speed Control and Sense Signals					
Parameter	Symbol	Minimum	Maximum	Unit	Condition
Module output SCL and SDA	VOL	0	0.4	V	
Module Input SCL and SDA	VIL	-0.3	VCC*0.3	V	
	VIH	VCC*0.7	VCC+0.5	V	
InitMode, ResetL and ModSelL	VIL	-0.3	0.8	V	
	VIH	2	VCC+0.3	V	
IntL	VOL	0	0.4	V	
	VOH	VCC-0.5	VCC+0.3	V	

Mechanical Diagram

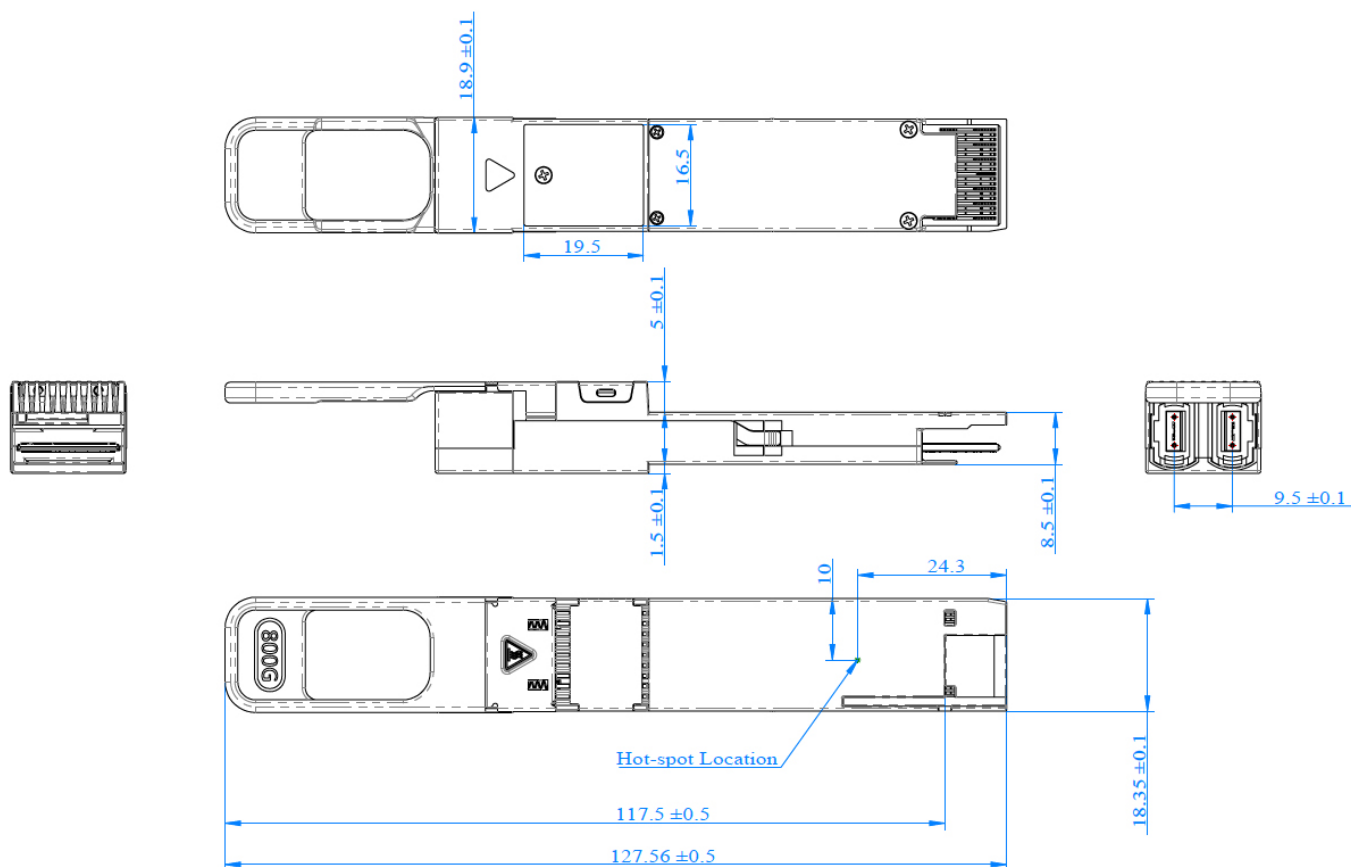

Note:

External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.

Ordering Information

OEM	Part Number	OEM	Part Number
Arista	QDD-800G-DR8-A	Cisco	QDD-8X100G-DR-M16-A
Juniper	QDD-2X400G-DR4-A	MSA	AN-QDD-800G-DR8-M16

To learn more visit

approvednetworks.com